


# Plunger Pump Demonstration Unit – FM53

The FM53 replicates a plunger pump as used in industry to pump small quantities of liquid at high pressures. Electronic sensors measure the instantaneous cylinder pressure within the pump, the pump displacement and the cumulative flow.

STAINLESS STEEL CONSTRUCTION WITH TRANSPARENT TEST SECTION CONTROL AND DATA LOGGING VIA PC SIMPLE USB CONNECTIVITY

The plunger or ram pump is a positive displacement pump and is used for pumping small quantities of liquid at high pressure. It is similar to a piston pump except that the sealing gland is at one end of the cylinder.

The reciprocating motion of the plunger gives an uneven flow, although the inclusion of a damping vessel can reduce this effect. Priming is

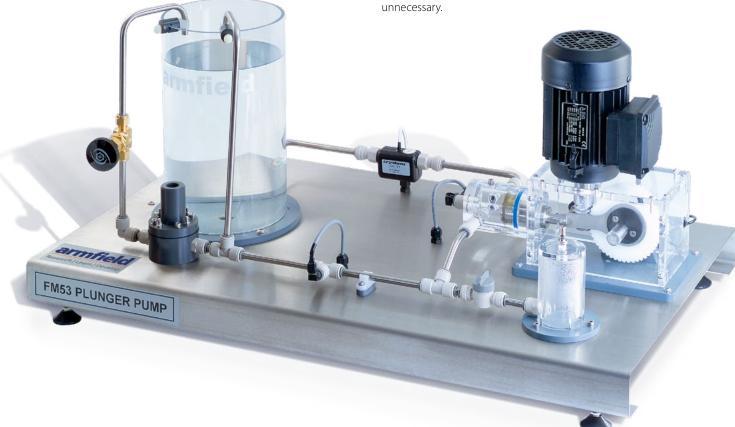



Clear view of the plunger pump

UK office - email: sales@armfield.co.uk tel: +44 (0) 1425 478781 (for ROW) USA office - email: info@armfield.inc tel: +1 (609) 208-2800 (USA only)

# Description

A motor-driven plunger pump, mounted on a stainless steel plinth with a water reservoir, pulsation damper and pipework for continuous circulation.

The pump head, measuring tank, pulsation damper and the water reservoir are manufactured from clear acrylic for maximum visibility. The pump outlet is connected to both a sprung loading valve and a needle valve to investigate different loading characteristics.

A pressure relief valve protects the operator and the equipment. An additional valve can be used to isolate or include the pulsation damper, allowing the effect of damping to be investigated

Electronic sensors measure the instantaneous cylinder pressure within the pump, the pump displacement and the cumulative flow over a period of time.



# Requirements Scale

- ► Armfield IFD7
- ► Software requires a computer running Windows XP or above with a USB port (computer not supplied by Armfield)

Technical specifications	
Max flow rate:	0.725 l/m typical
Max head:	4 bar
Swept volume:	15mm stroke x 32mm diameter
Pumping speed:	0 to 60 strokes/min
Motor power rating:	250W
Pressure Sensor:	0 to 100psi
Piston Sensor:	-9 to 16mm
Motor Torque range:	0 to 2.1Nm

Overall dimensions		
Length	0.88m	
Width	0.51m	
Height	0.41m	
Packed and crated shipping specifications		
Volume	1.0m <sup>3</sup>	
Gross weight	120kg	

### **Demonstration capabilities**

- ► Measurement during each pump cycle of:
  - Plunger displacement
  - Cylinder pressure
  - Pump outlet pressure
- ► On-line p-V diagram displays
- ► Measurement of volumetric efficiency
- ► Measuring the effect on pump performance of:
  - Sprung loading valve or needle valve
  - Adjusting the outlet loading valve
  - The inclusion of a pulsation damper vessel

### Software

The ArmSOFT software enables the operator to control the pump speed 0 to 100%. Feedback from the sensors is then displayed in real time for the end user with simultaneous data logging.

The data trend is also displayed graphically in real time and can be exported to another platform such as Excel for further analysis.

# Essential accessories / equipment

► Armfield IFD7

### **Ordering specification**

- ► A small-scale plunger pump demonstration unit comprising of a water reservoir, pump, control valve, relief valve and interconnecting pipework, all mounted on a stainless steel base
- ► Includes both a sprung loading valve and a needle valve for loading the pump
- ▶ Equipped with electronic measurement sensors for cylinder pressure, plunger position, pump outlet pressure and cumulative flow
- ► Pulsation damping facility
- ► Transparent pump head for visibility
- ► Capable of being linked to a PC (not supplied) via a USB interface console (an essential accessory), which does not require internal access to the computer. Also enables interfacing to other software packages
- Supplied with software providing full instructions for setting up, operating, calibrating and performing the teaching exercises.
  Facilities for logging, processing and displaying data graphically
- ► Offers a complete teaching package of coursework and laboratory investigation

## **Ordering codes**

► FM53

▶ IFD7-A: 220-240V / 1Ph / 50Hz▶ IFD7-G: 220-240V / 1Ph / 60Hz

Armfield standard warranty applies with this product

# **Knowledge base**

- > 28 years' expertise in research & development technology
- > 50 years' providing engaging engineering teaching equipment Benefit from our experience, just call or email to discuss your

laboratory needs, latest project or application.

armfield.co.uk

An ISO 9001:2015 Company

Products C € certified

## **Aftercare**

Installation Commissioning Training Service and maintenance Support: armfieldassist.com