# **SV** SERIES

#### Forces in a Truss

### **Deflection of Trusses – SV202**

The experiment Deflection of Trusses allows the experimental investigation of deformation in trusses under load.

This then allows Castigliano theorems to be proven.


#### This experiment has the following properties:

- Assembly of three 3-bay trusses via various length members, detent pins and joint hubs
- ▶ Up to 10 members possible in one joint hub

► Common members between all three trusses

ALLOWS THE EXPERIMENTAL INVESTIGATION OF DEFORMATION IN TRUSSES UNDER LOAD SOFTWARE INCLUDED AS STANDARD

**SV100** Bench mounted frame (sold separately)

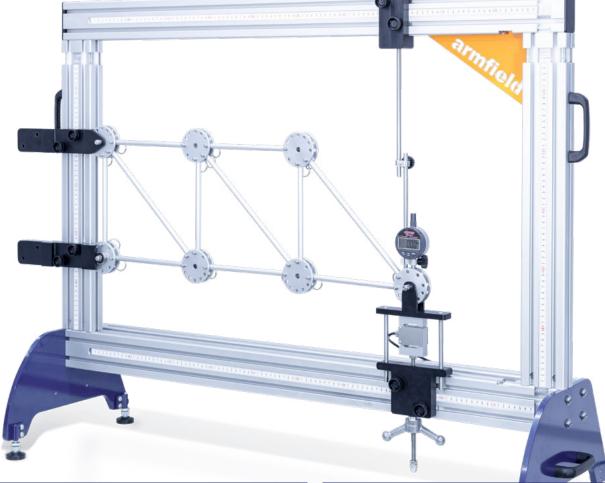



UK office - email: sales@armfield.co.uk tel: +44 (0) 1425 478781 (for ROW) USA office - email: info@armfield.inc tel: +1 (609) 208-2800 (USA only)

Issue: 1 Applications
URL: http://www.armfield.co.uk/structures ME CE IP
We reserve the right to amend these specifications without prior notice. E&OE © 2021 Armfield Ltd. All Rights Reserved

#### Description

One of a range of experiment frameworks that teach structure principles, this experiment kit consists of 25 truss members of various lengths allow the construction of three 5-bay cantilever truss frameworks, with one framework having a 30° top member inclination.

The frames mount on two side brackets mounted from the left vertical edge of the universal frame. One bracket has a pivoting support whilst the other acts as a pivoting and rolling support. Forces can be applied to any truss hub using the load cell assembly.

Deflection can be measured at any point on the framework using the digital indicator attached to the guide rod of the DTI mounting assembly suspended from the universal frame top rail. This assembly is fully adjustable and can be manoeuvred accurately over the joint.

# Requirements Scale | Scale | Sv | Sv | Sv | Sv | Sv | Sv | Indian India

Electrical supply: 110/120V, 60Hz or 220/240V, 50Hz

SV100: Bench Mounted Frame
 SV101: Structures Interface Unit
 SV103: Frame Mounting Kit

▶ PC with a USB port, running Windows 7 or above

#### **Technical specification**

- 7 x Truss Joint Hub
- ► Angle graduations: 30°,45°,60°,90°
- ► 1 x 80.5mm Member
- ➤ 3 x 176.5mm Member
- ≥ 2 x 198mm Member
- ► 6 x 207.5mm Member
- ▶ 1 x 272.5mm Member
- ▶ 3 x 295.5mm Member
- ► 1 x 325.5mm Member
- ▶ 1 x 370mm Member
- ► Truss Members
- ► Aluminium tube: Ø 10 x 1.0mm
- ► Material: 6060 T6 BS EN 755-2:2016
- ► Cross-sectional area: 28.274 x 10<sup>-6</sup>m<sup>2</sup>
- ▶ 2 x Sealed Bearing
- ▶ 22 x 6mm Detent Pin
- ► Load Cell Assembly
- ▶ Unit: DBBSM Series S-Beam Load Cell
- ► Force range: 0–400N
- ► Measurable range of the digital indicator: 12.7mm (DTI)
- ► Resolution: 0.01mm

Overall dimensions								
Length	1.176m							
Width	0.392m							
Height	0.922m							
Packed and crated shipping specifications								
Volume	0.1m <sup>3</sup>							
Gross weight	25 kg							

#### **Experimental content**

- Comparison of experimental deflections with theoretical values derived from Castigliano's second theorem
- Study of efficiency of different trusses
- Construction of pin jointed trusses

#### Features / benefits

- Three trusses from one kit
- True pin jointed structures
- Assembly of each truss
- ► Loading can be applied at all joints
- ▶ DTI adjustable to all joints (Digital Testing Indicator)
- Software included as standard

#### **Related laws**

- Statically Determinate Frameworks
- Method of Joints
- Method of Sections
- Stress
- Strain
- Area
- Young's Modulus
- Castigliano's Theorem
- ► Reactions
- Unit Load
- Compression
- Tension

Gr	ap	hin	g detail							
788	6.00	60.0			SG5 _ 696		565_202.34		SG5 715.27_	
627	4.00	40.0		All The same of th	566	603.96	\$66 6	15.27	505 50L2	
466	2.00	20.0	SG4 510.83 SG3 414.46	563	5G4 495,88 414.86	SG3 -	54 491 D4 114.46		501_13	
305	0.00	0.00			27	5G2 315.27		5G2 315.27		
144	-2.00	-20.00				SG1 215.27		61 215.27		

#### Essential accessories/equipment

SV100: Bench Mounted Frame
 SV101: Structures Interface Unit
 SV103: Frame Mounting Kit

#### **Related products**

#### Forces in a truss

SV200: Pin-Jointed Frameworks (Roof and Warren Truss)SV201: Forces in a Truss and Redundant Truss

#### **Operational conditions**

- ► Storage temperature: -10°C to +70°C
- ► Operating temperature range: +10°C to +50°C
- Operating relative humidity range: 0 to 95%, non-condensing

#### **Ordering codes**

SV202: Deflection of Trusses

SV100: Bench Mounted Frame (Sold separately)
 SV101: Structures Interface Unit (Sold separately)

SV103: Frame Mounting Kit (Sold separately)

Armfield standard warranty applies with this product

## Knowledge base

- > 28 years expertise in research & development technology > 50 years providing engaging engineering teaching equipment
- Benefit from our experience, just call or email to discuss your laboratory needs, latest project or application.



armfield.co.uk

#### **Aftercare**

Installation
Commissioning
Training
Service and maintenance
Support: armfieldassist.com